



WORLDWIDE



**THE STANDARD
IN TIG WELDING**

Flex-Loc™ Torches

Designed to give welders more versatility, the CK Flex-Loc™ torches are perfect for hard to reach welds and positions. The 360 degree rotating head locks at the desired angle for ultimate control.



- 360 degree variable angle torch head
- Locks in any position
- Interchangeable torch head for quick setup changes
- Great for "walking the cup" on open root welds
- Ergonomic design for ultimate comfort and control

CK Worldwide, Inc
P.O. Box 1636, Auburn, WA 98071 USA
Phone: 1.800.426.0877
Fax: 1.800.327.5038

Form 456
www.CKWORLDWIDE.com

Connect with us on:




FLEX-LOC TORCH REPLACEMENT PARTS

2 SERIES

GAS-COOLED

FL130 AND FL130V

FL2L TORCH HEAD
Comes complete with
2GHS heatshield and
01-0009 screw with
O-Ring



FL130


FLTBA



HS Torch Handle

FL130V

FLTBAV

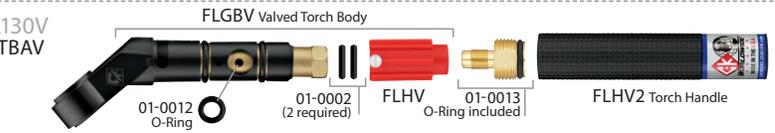

FLHV2 Torch Handle

3 SERIES

GAS-COOLED

FL150 AND FL150V

FL3L TORCH HEAD
Comes complete with
300HS heatshield and
01-0009 screw with
O-Ring



FL150


FLTBA



HS Torch Handle

FL150V

FLTBAV

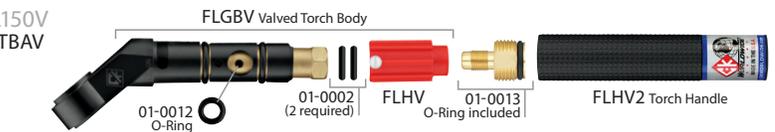

FLHV2 Torch Handle

2 SERIES

WATER-COOLED

FL230

FL2L TORCH HEAD
Comes complete with
2GHS heatshield and
01-0009 screw with
O-Ring



FL230

FLTBAW




HS Torch Handle

3 SERIES

WATER-COOLED

FL250

FL3L TORCH HEAD
Comes complete with
300HS heatshield and
01-0009 screw with
O-Ring



FL250

FLTBAW



HS Torch Handle

FL130 & FL130V (130amps)

Head Style	Cable	Cable Length	Standard	Super-Flex™
FL2L	1 Piece	12 1/2 ft. (3.8m)	FL1312	FL1312SF
		25 ft. (7.6m)	FL1325	FL1325SF
FL2L w/ valve	1 Piece	12 1/2 ft. (3.8m)	FL1312V	FL1312VSF
		25 ft. (7.6m)	FL1325V	FL1325VSF

FL150 & FL150V (150amps)

Head Style	Cable	Cable Length	Standard	Super-Flex™
FL3L	1 Piece	12 1/2 ft. (3.8m)	FL1512	FL1512SF
		25 ft. (7.6m)	FL1525	FL1525SF
FL3L w/ valve	1 Piece	12 1/2 ft. (3.8m)	FL1512V	FL1512VSF
		25 ft. (7.6m)	FL1525V	FL1525VSF

FL230 (230amps) & FL250 (250amps)

Head Style	Cable	Cable Length	Standard	Super-Flex™
FL2L	TriFlex or Super-Flex™	12 1/2 ft. (3.8m)	FL2312	FL2312SF
		25 ft. (7.6m)	FL2325	FL2325SF
FL3L	TriFlex or Super-Flex™	12 1/2 ft. (3.8m)	FL2512	FL2512SF
		25 ft. (7.6m)	FL2525	FL2525SF

CK Worldwide, Inc

P.O. Box 1636, Auburn, WA 98071 USA

Phone: 1.800.426.0877

Fax: 1.800.327.5038

Form 456

www.CKWORLDWIDE.com

Connect with us on:

